


# REXTRON<sup>®</sup>

DIGITAL WALL TILES



300mm X 450mm  
Digital Wall Tiles



## TEMPLE SERIES

# WALL



## Collection

**7.5 MM**  
THICKNESS

Weight	10.4 kg Approx
Sq. ft	8.71 Per Box
Sq. mtr	0.81 Per Box

# PRODUCT APPLICATION



Frost  
Resistant



Resistant to  
Thermal Shock



Stain  
Resistant



Durable  
Over Time



Resistant to  
Deep Scratch



Suitable for  
Crowded Area



Slip  
Resistant



Resistant to  
Acids and Chemicals



Environment  
Friendly



Resistant to  
Loads



Rectified




300X450MM

TEMPLE SERIES

**REXTRON**<sup>®</sup>  
DIGITAL WALL TILES



536\_HL\_2

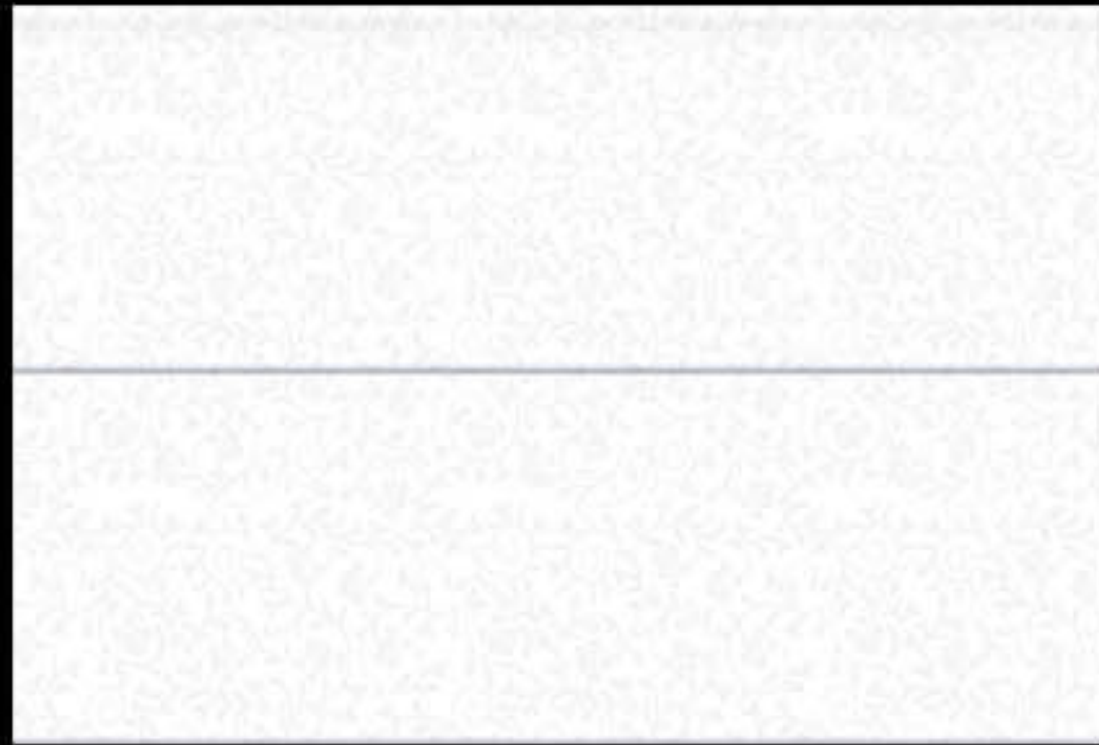


536\_LT



300X450MM

TEMPLE SERIES


**REXTRON**<sup>®</sup>  
DIGITAL WALL TILES

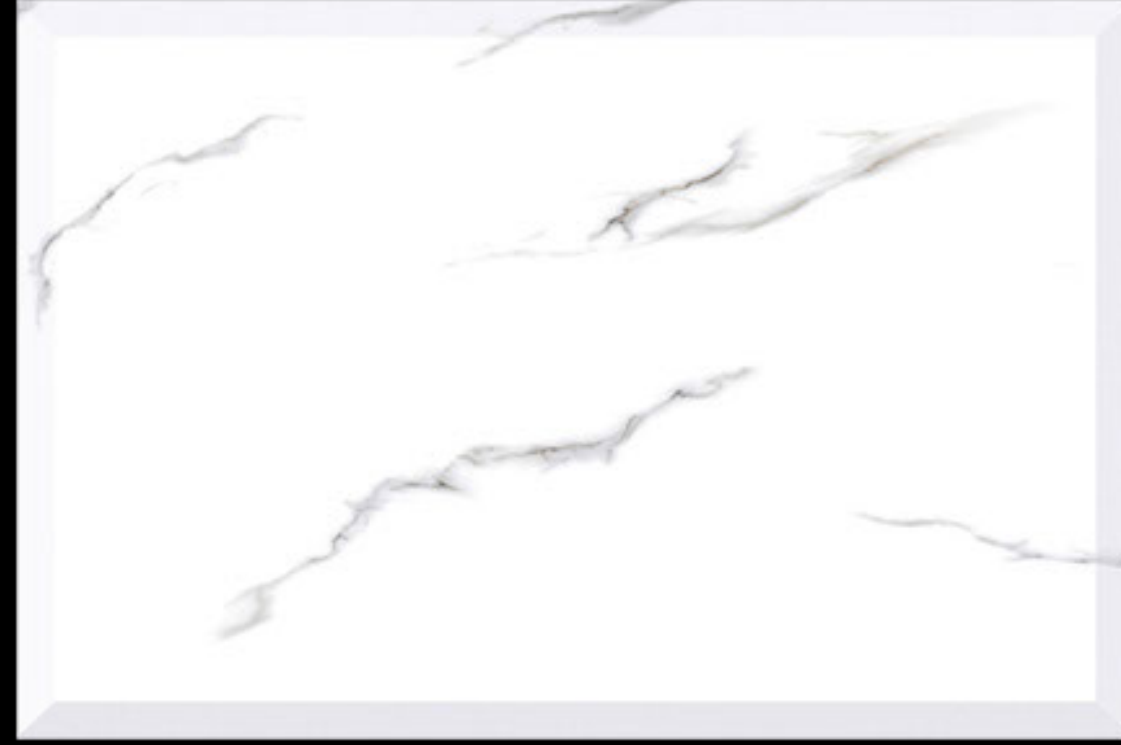

587\_LT



587\_HL-5

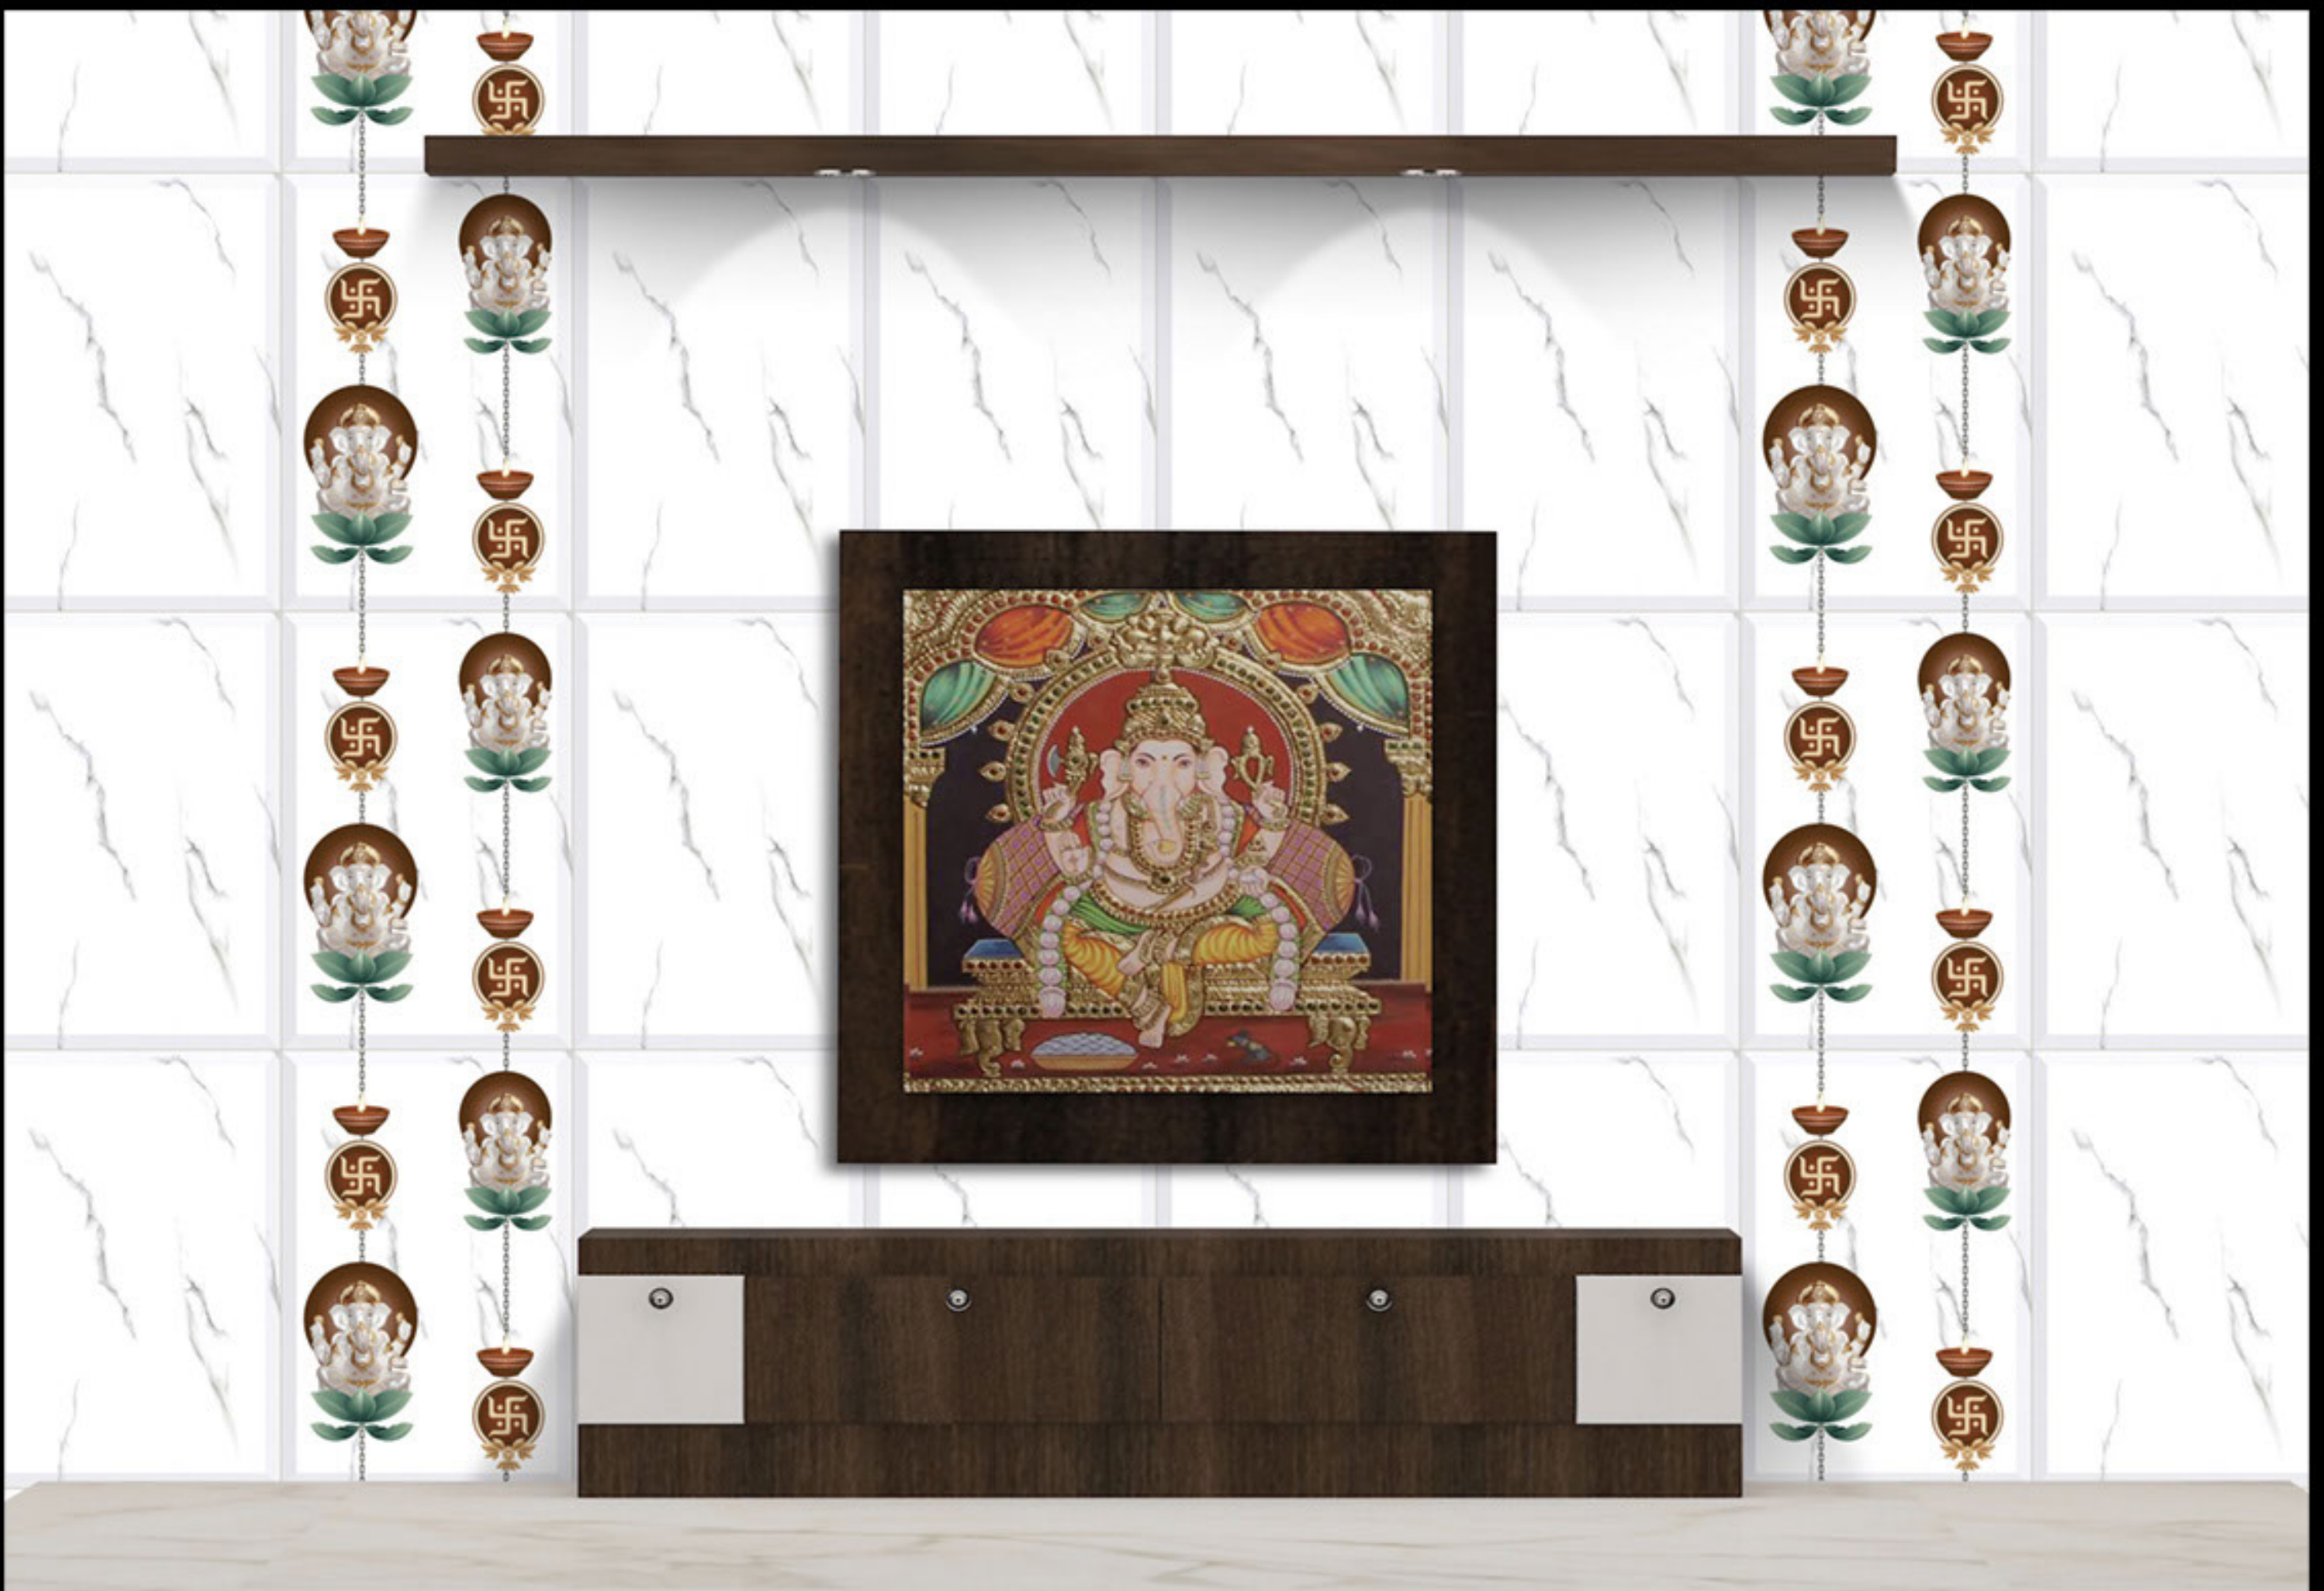


300X450MM

TEMPLE SERIES

**REXTRON**<sup>®</sup>  
DIGITAL WALL TILES



587\_LT

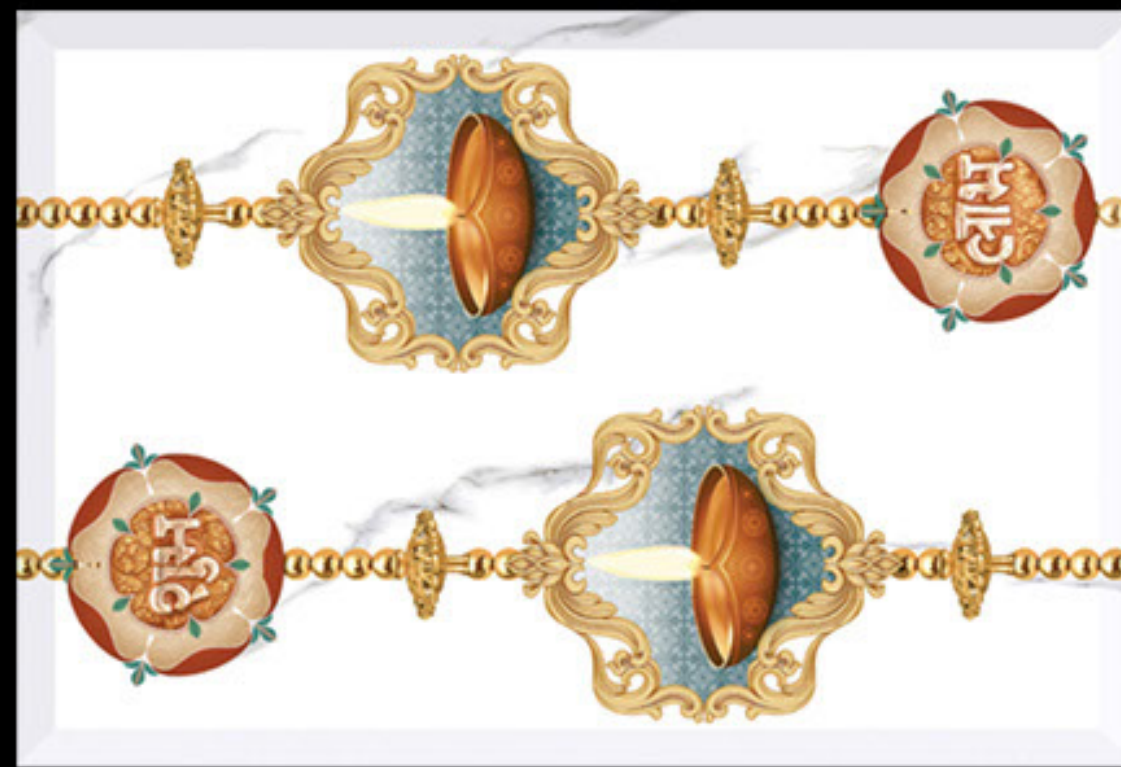


587\_HL-6



300X450MM

TEMPLE SERIES

**REXTRON**<sup>®</sup>  
DIGITAL WALL TILES

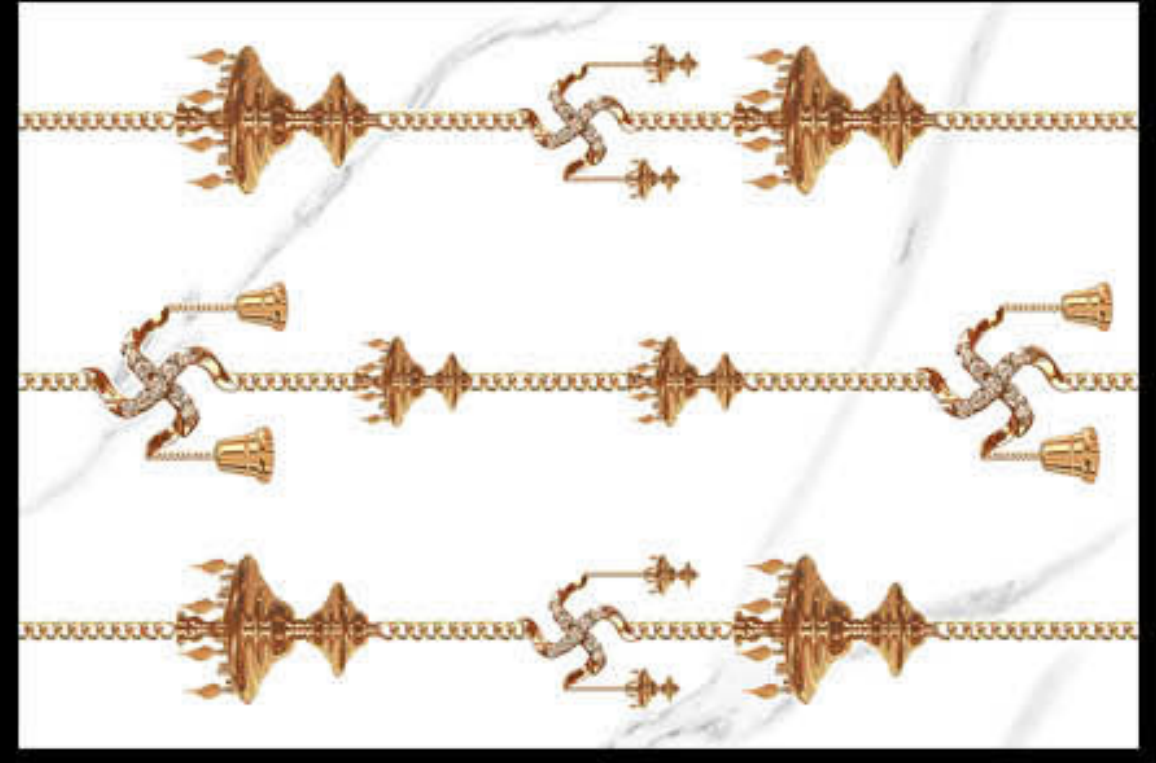


5081\_HL\_1




5081\_LT



5081\_HL\_2

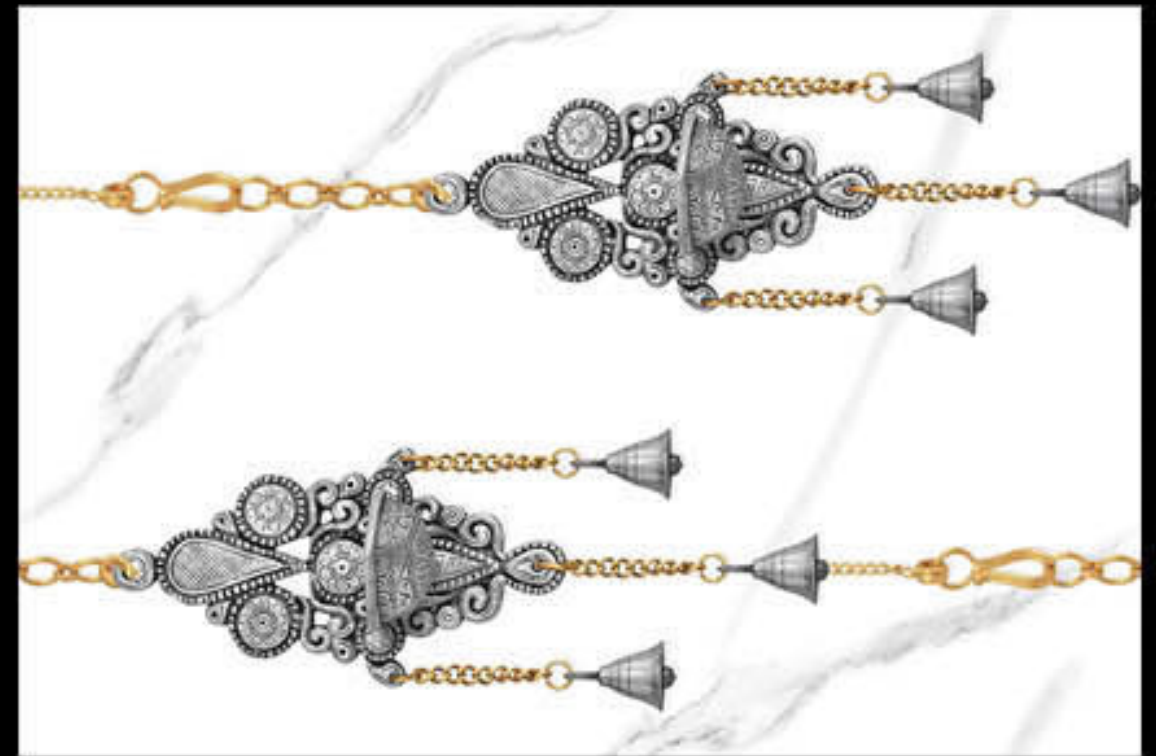


5081\_HL\_3

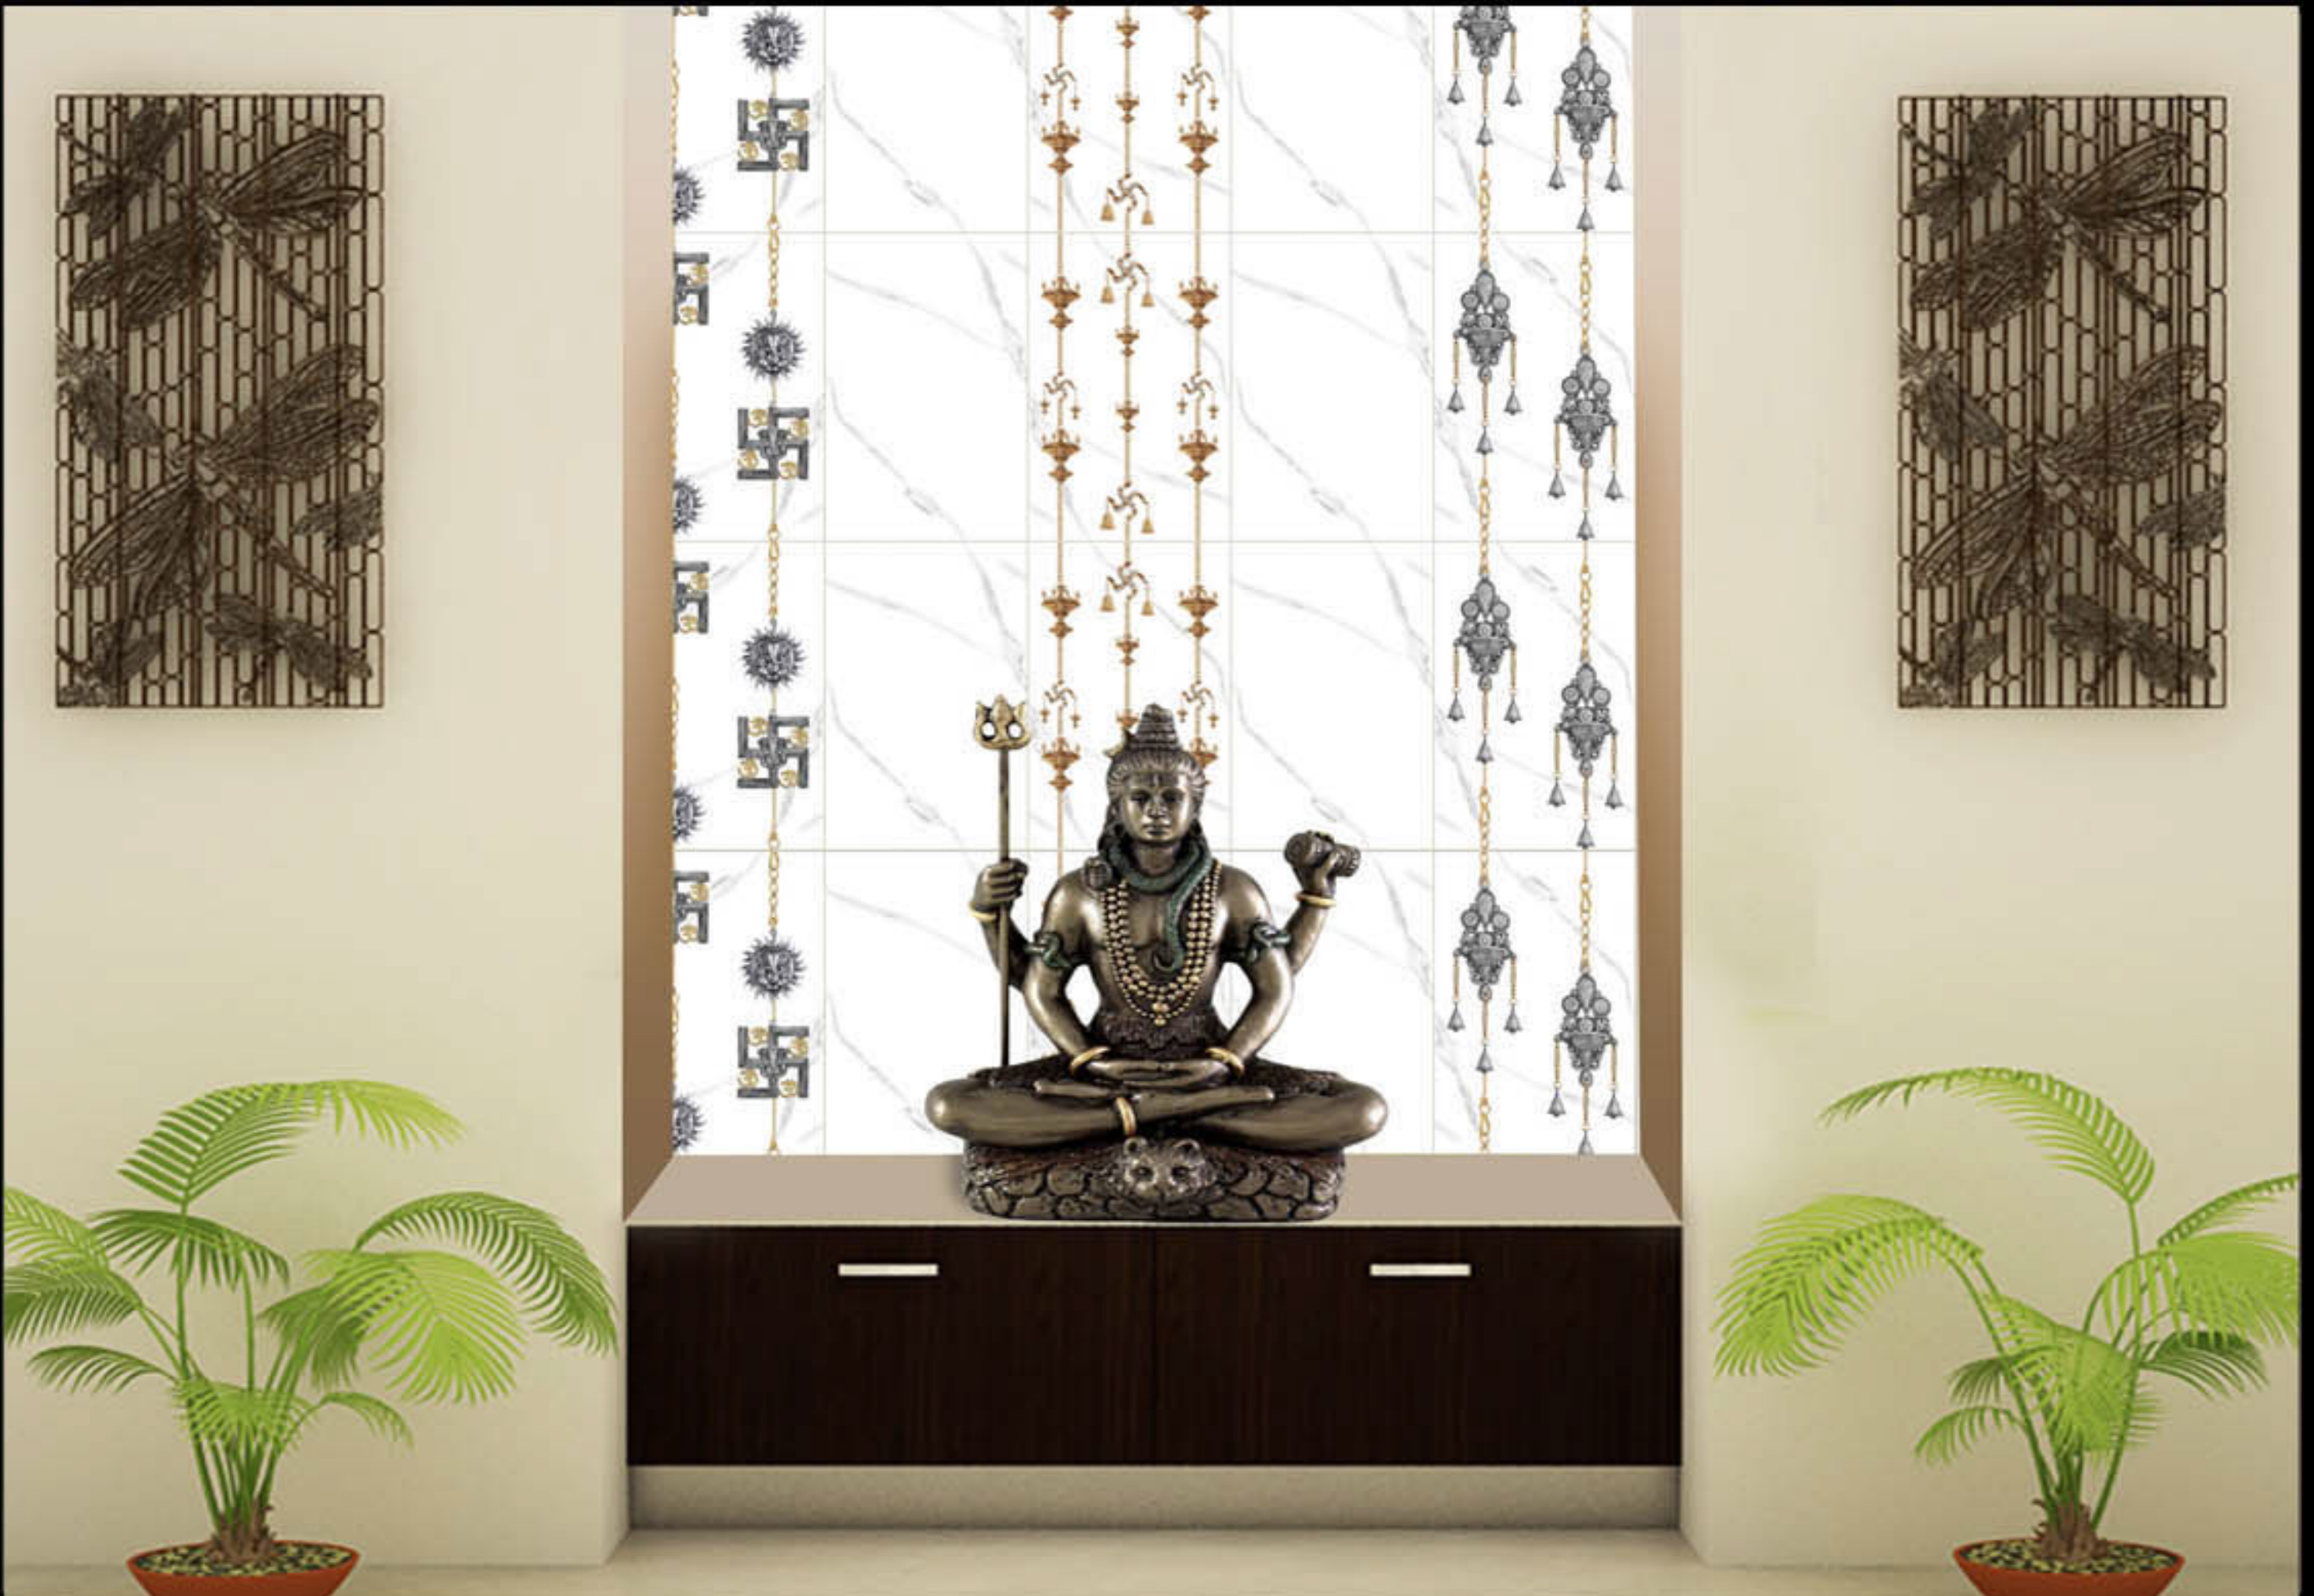

300X450MM

TEMPLE SERIES

**REXTRON**<sup>®</sup>  
DIGITAL WALL TILES

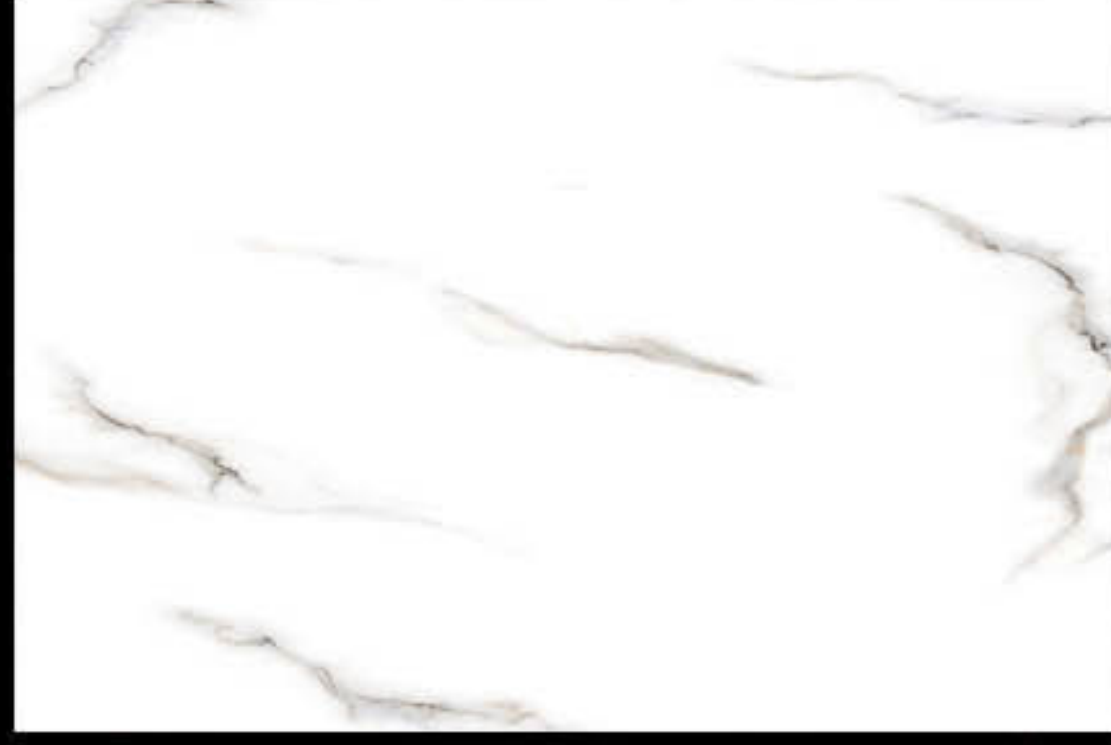

5117\_LT/5245\_LT

RANDOM



5117\_HL\_8






300X450MM

TEMPLE SERIES

**REXTRON**<sup>®</sup>  
DIGITAL WALL TILES

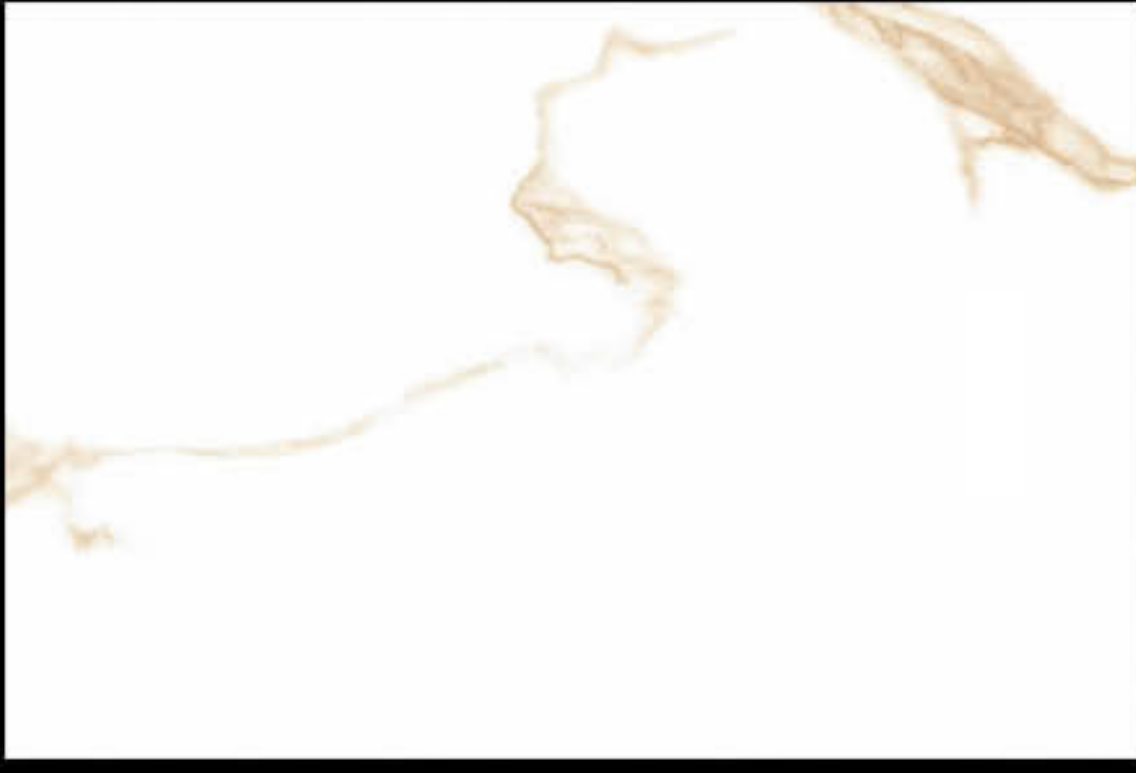

5211\_LT


RANDOM



5211\_HL\_2




5211\_HL\_1

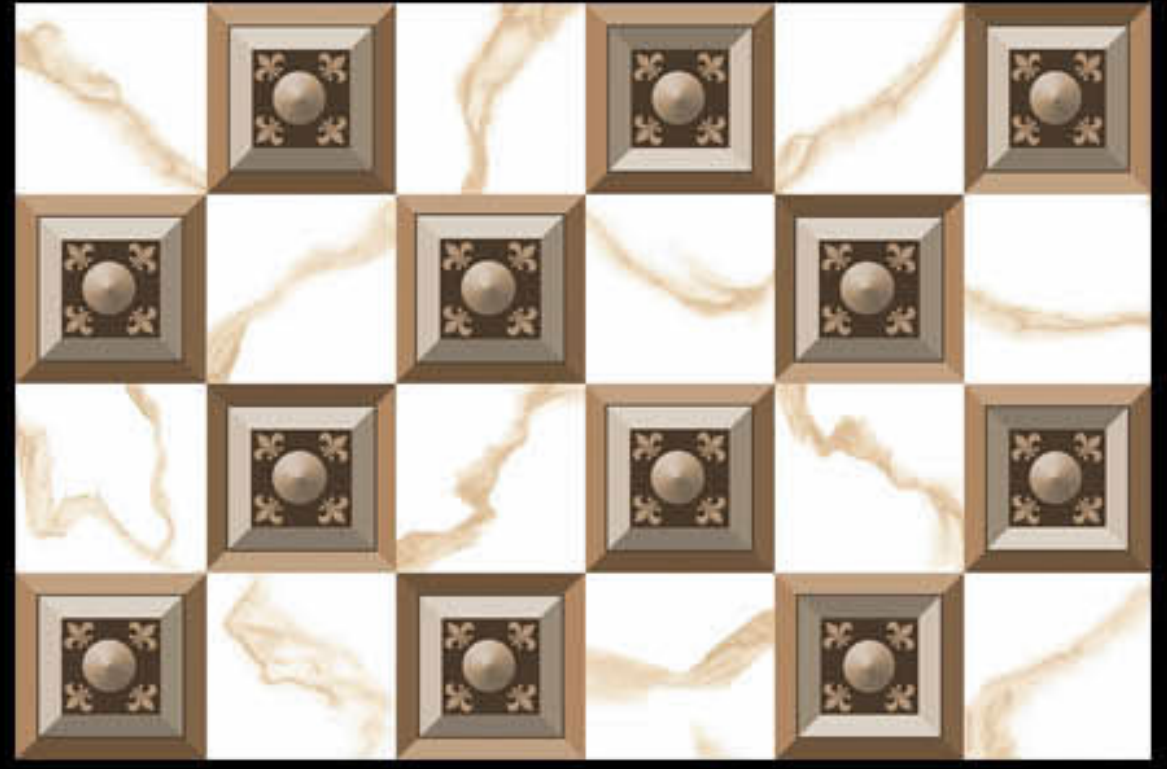

5211\_HL\_3




5211\_HL\_4

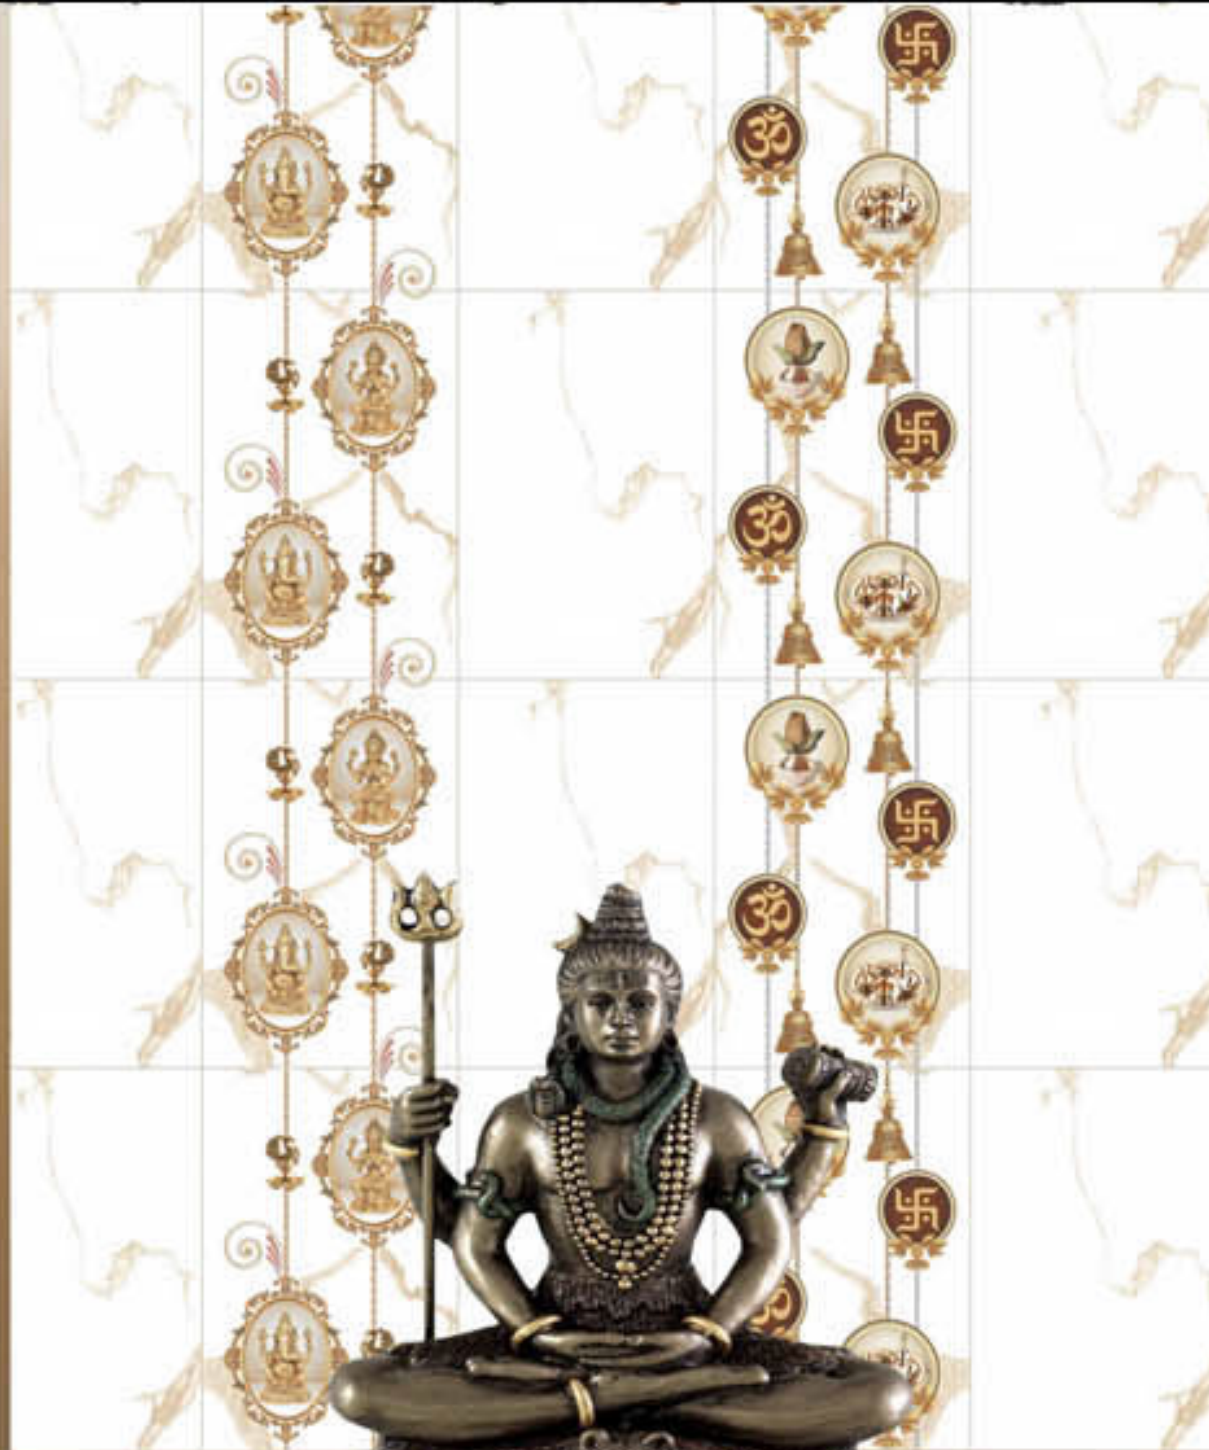

300X450MM

TEMPLE SERIES

**REXTRON**<sup>®</sup>  
DIGITAL WALL TILES

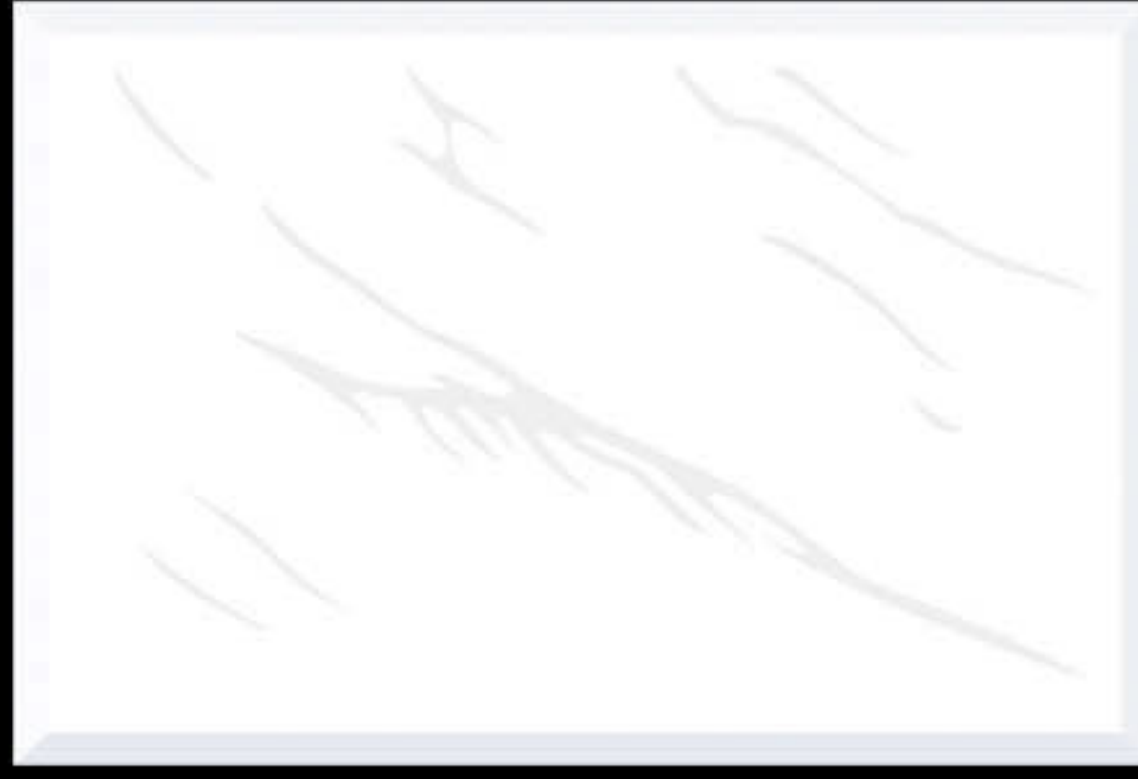

5453\_LT



5453\_HL-8




5453\_HL-9



300X450MM

TEMPLE SERIES


**REXTRON**<sup>®</sup>  
DIGITAL WALL TILES

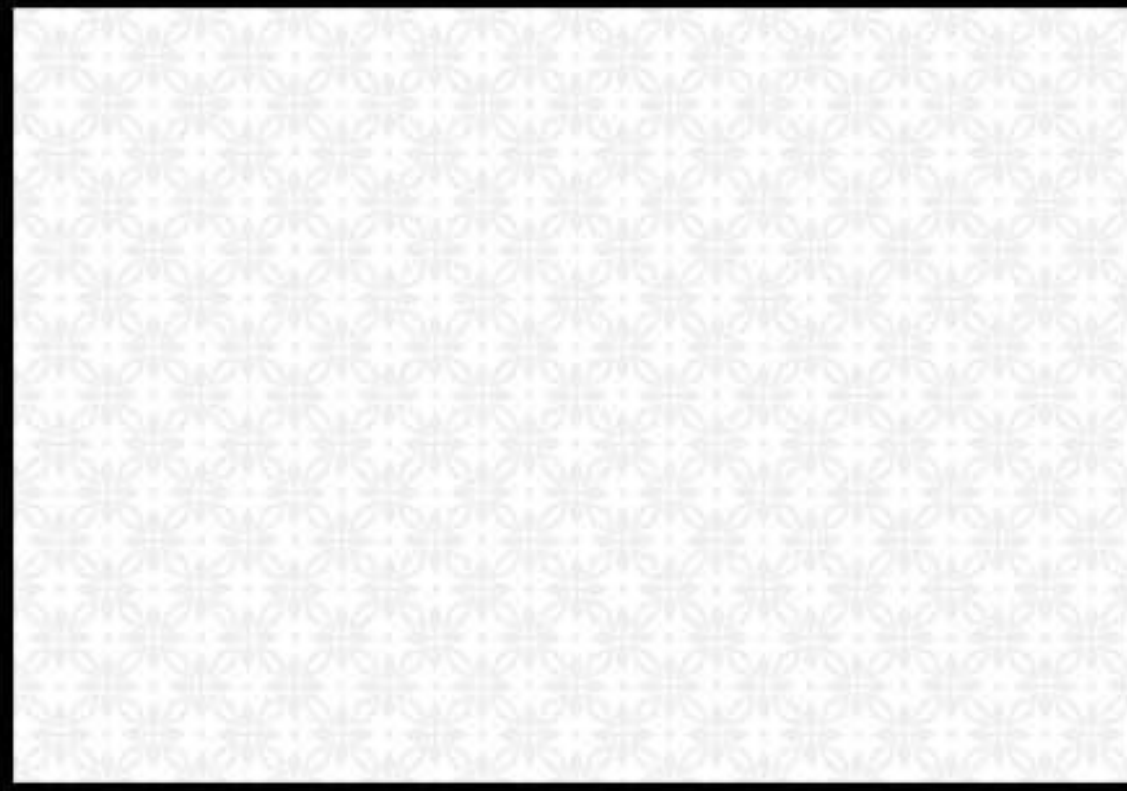


TEMPLE\_01\_LT



TEMPLE\_01\_HL\_1

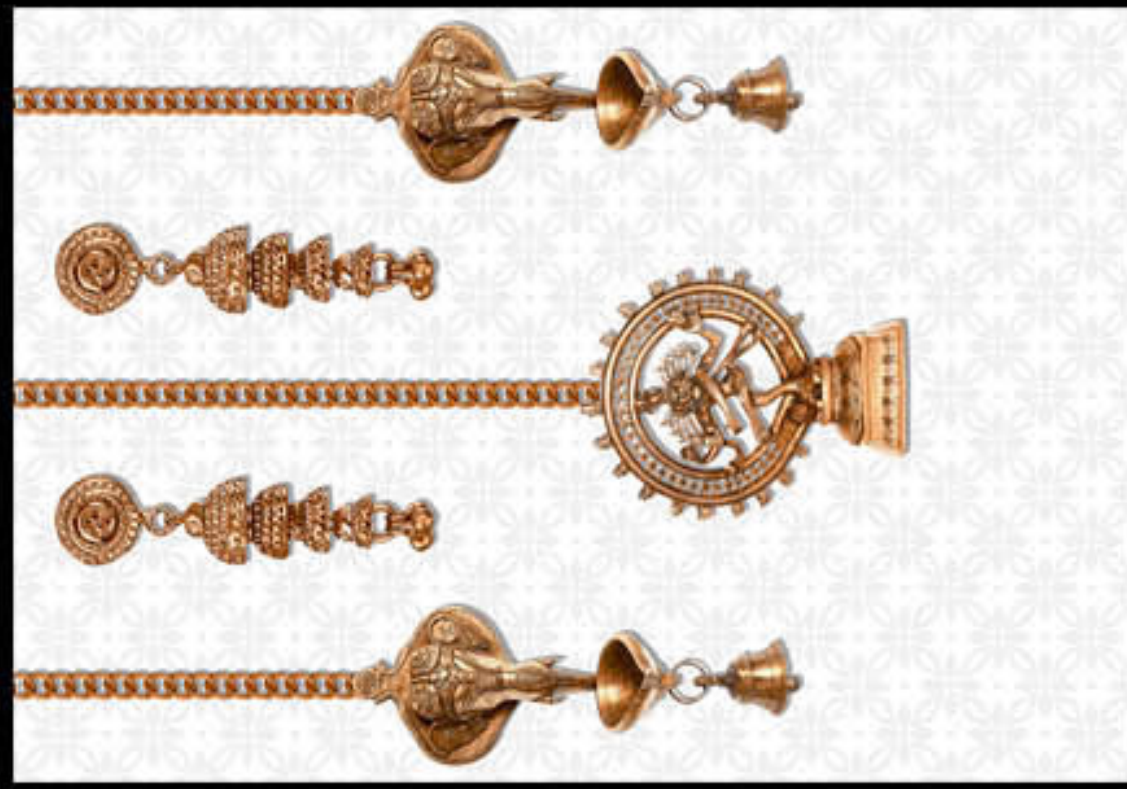

TEMPLE\_01\_HL\_2

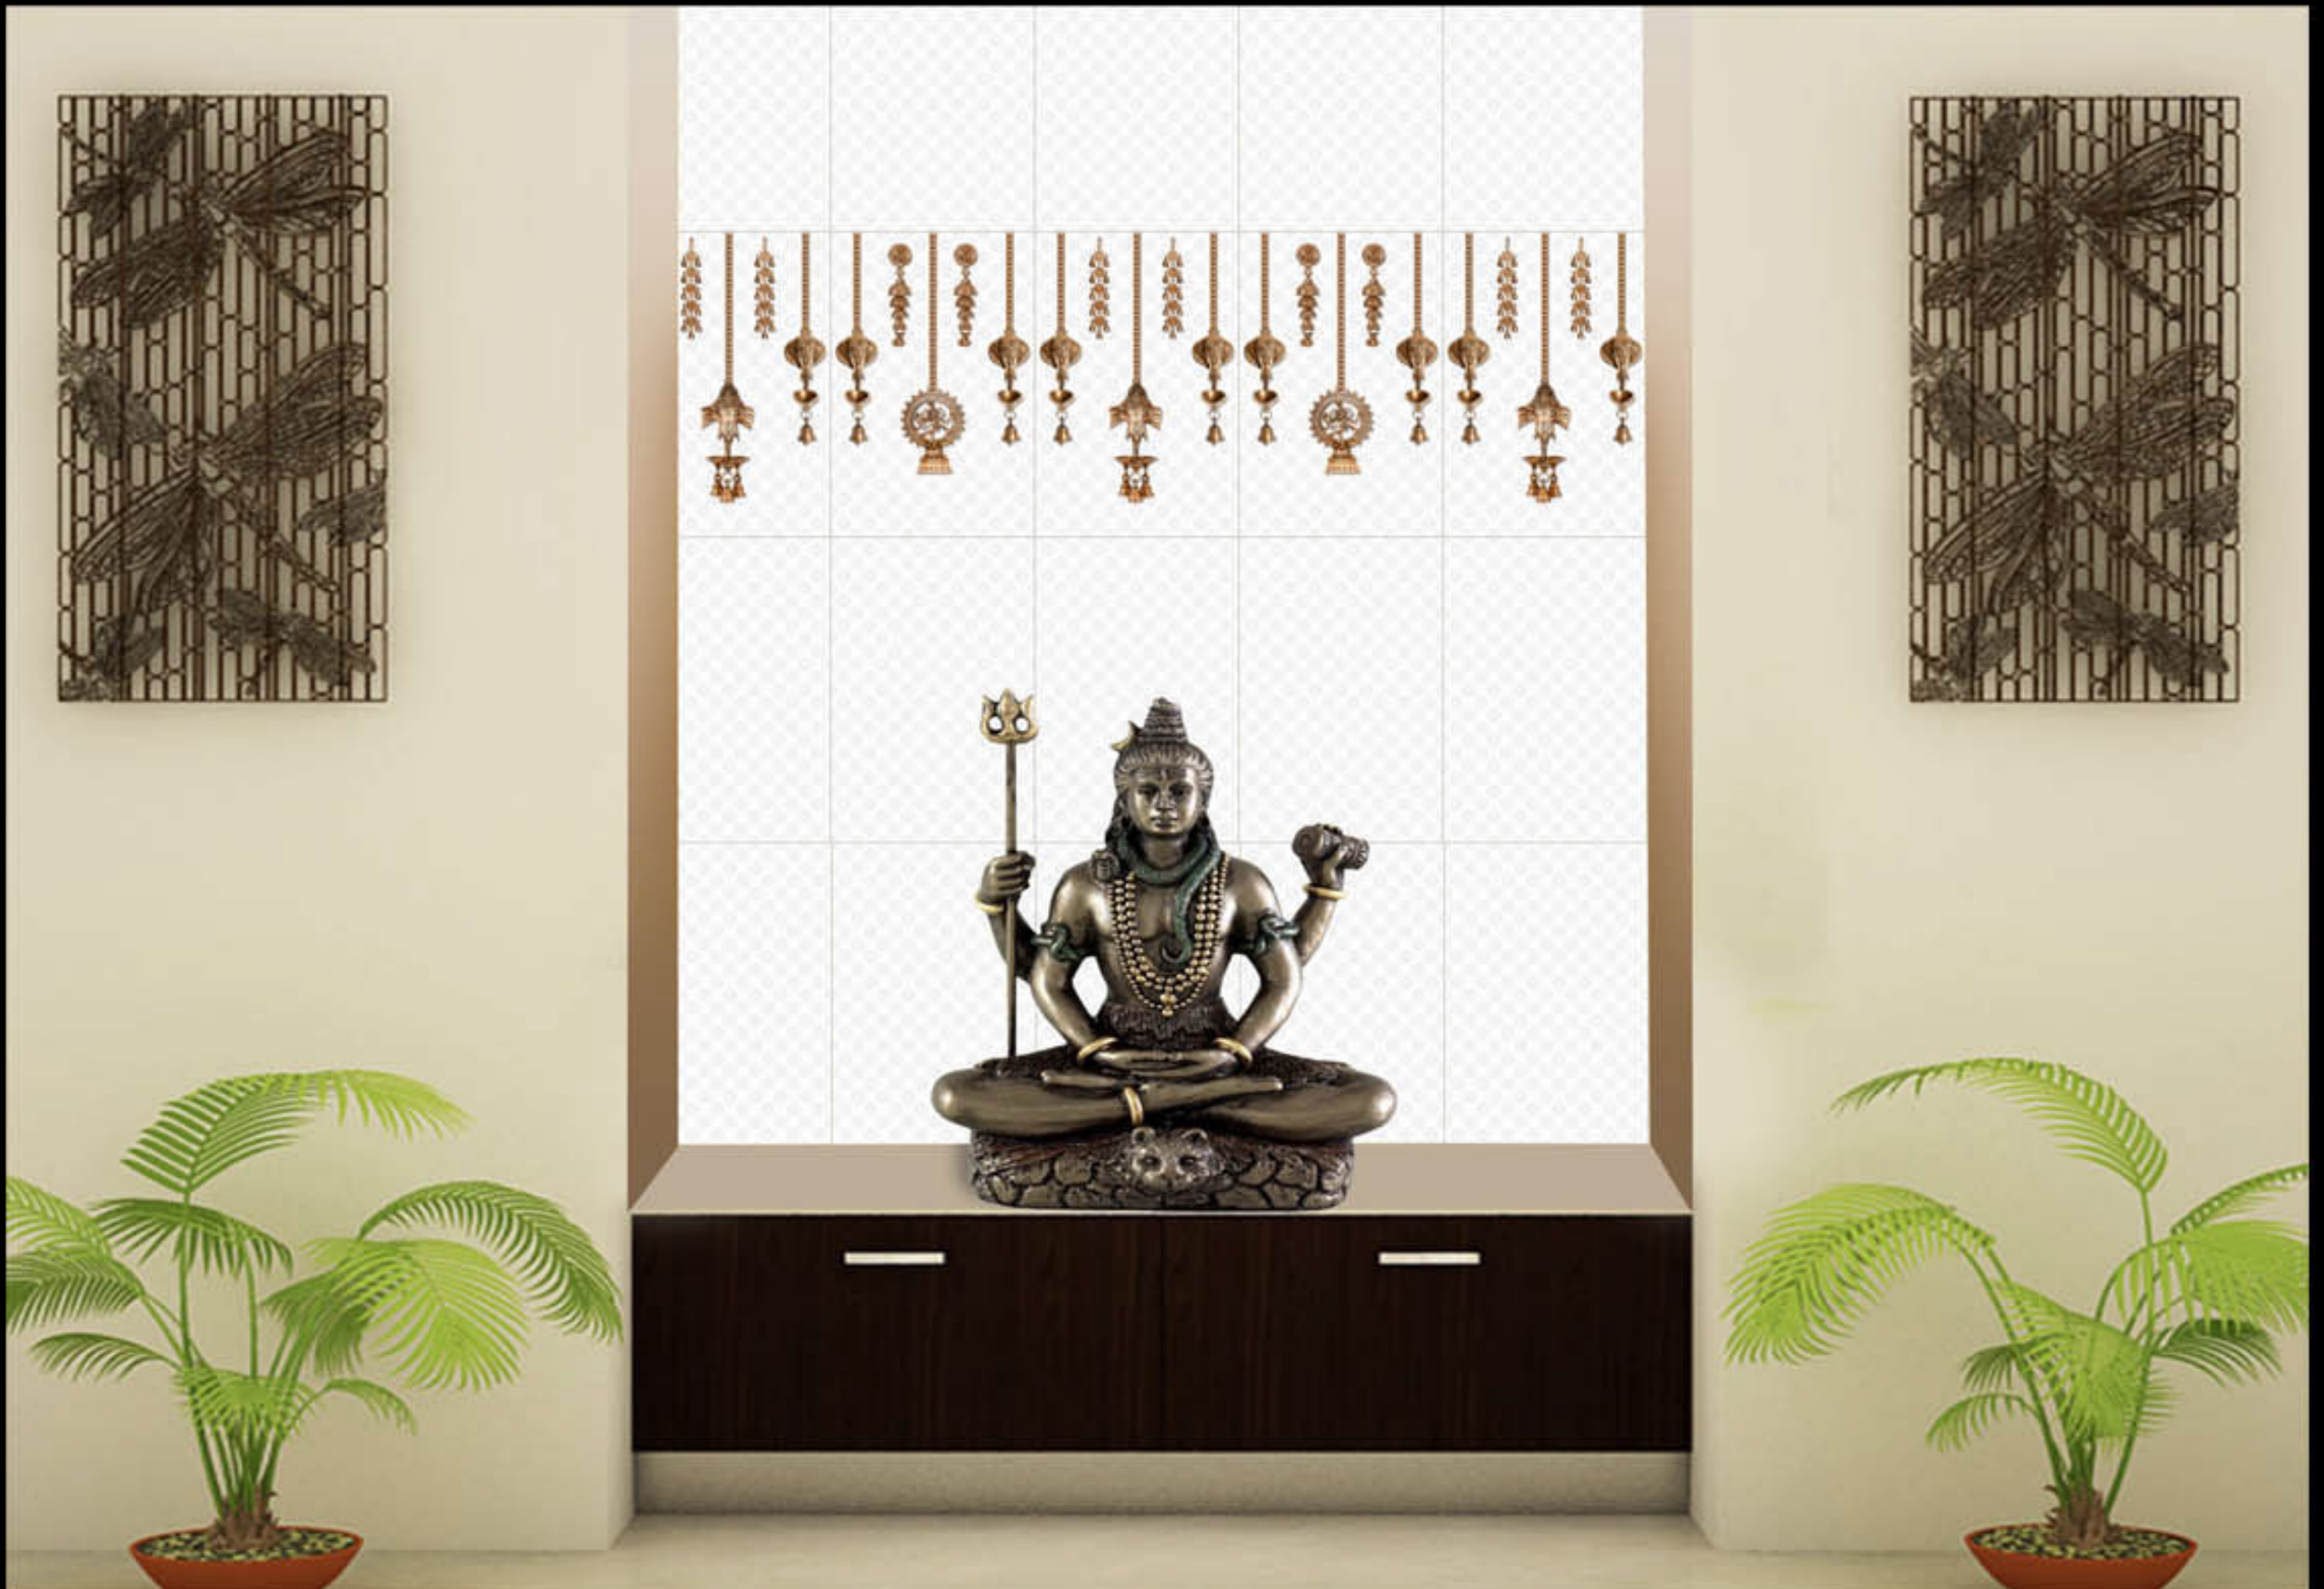

300X450MM

TEMPLE SERIES

**REXTRON**<sup>®</sup>  
DIGITAL WALL TILES



TEMPLE\_02\_LT      RANDOM



TEMPLE\_02\_HL\_1




TEMPLE\_02\_HL\_2



300X450MM

TEMPLE SERIES

**REXTRON**<sup>®</sup>  
DIGITAL WALL TILES

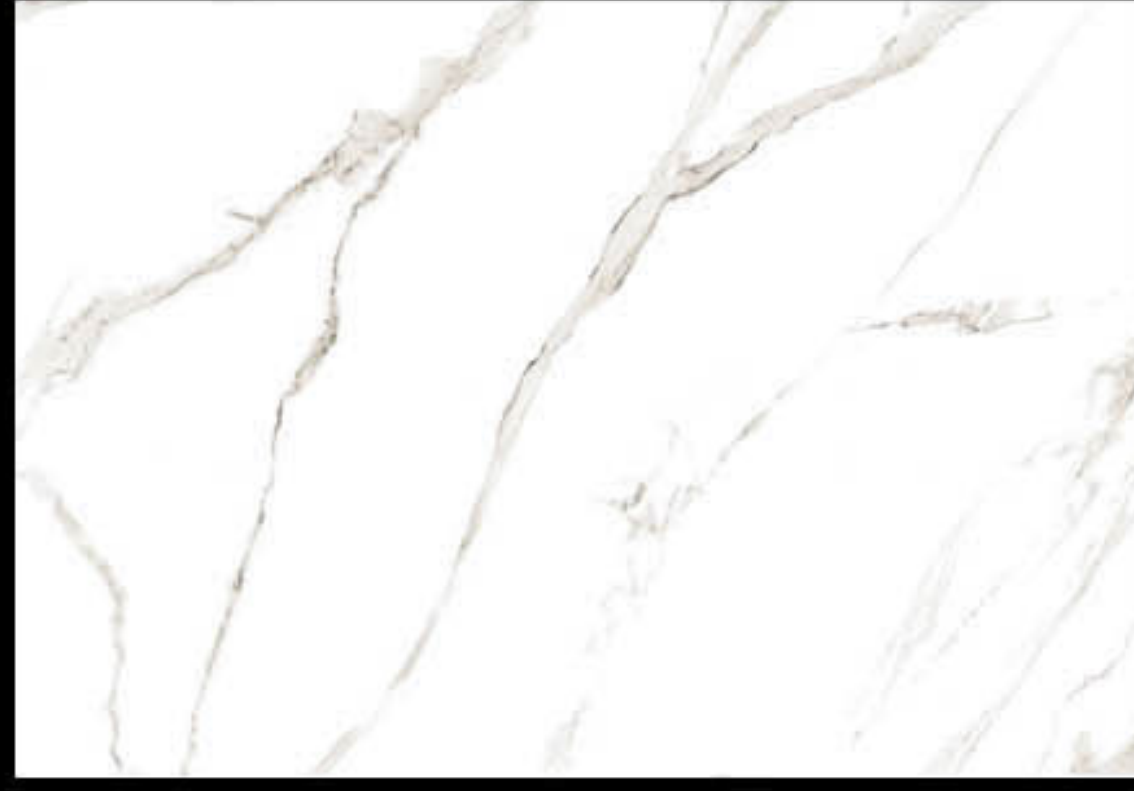

TEMPLE\_03\_LT

RANDOM



TEMPLE\_03\_HL\_1




TEMPLE\_03\_HL\_2



300X450MM

TEMPLE SERIES

**REXTRON**<sup>®</sup>  
DIGITAL WALL TILES

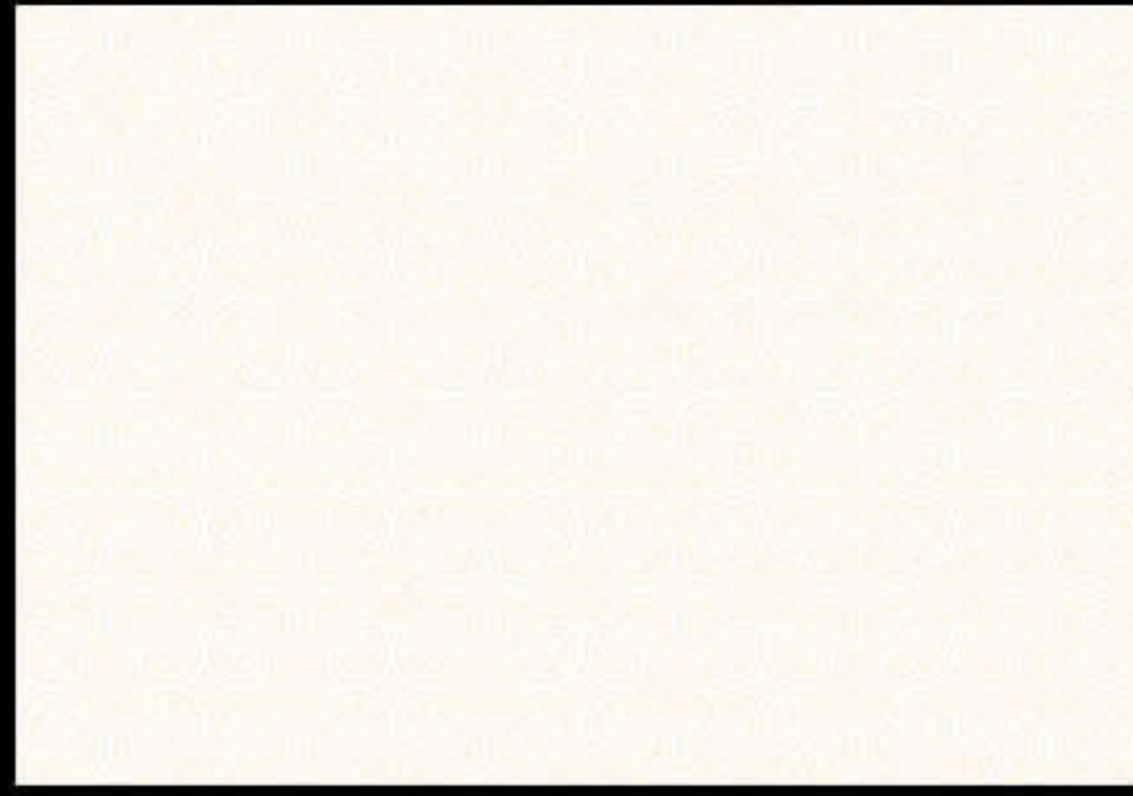

TEMPLE\_04\_LT



TEMPLE\_04\_HL\_1




TEMPLE\_04\_HL\_2



300X450MM

TEMPLE SERIES

**REXTRON**<sup>®</sup>  
DIGITAL WALL TILES

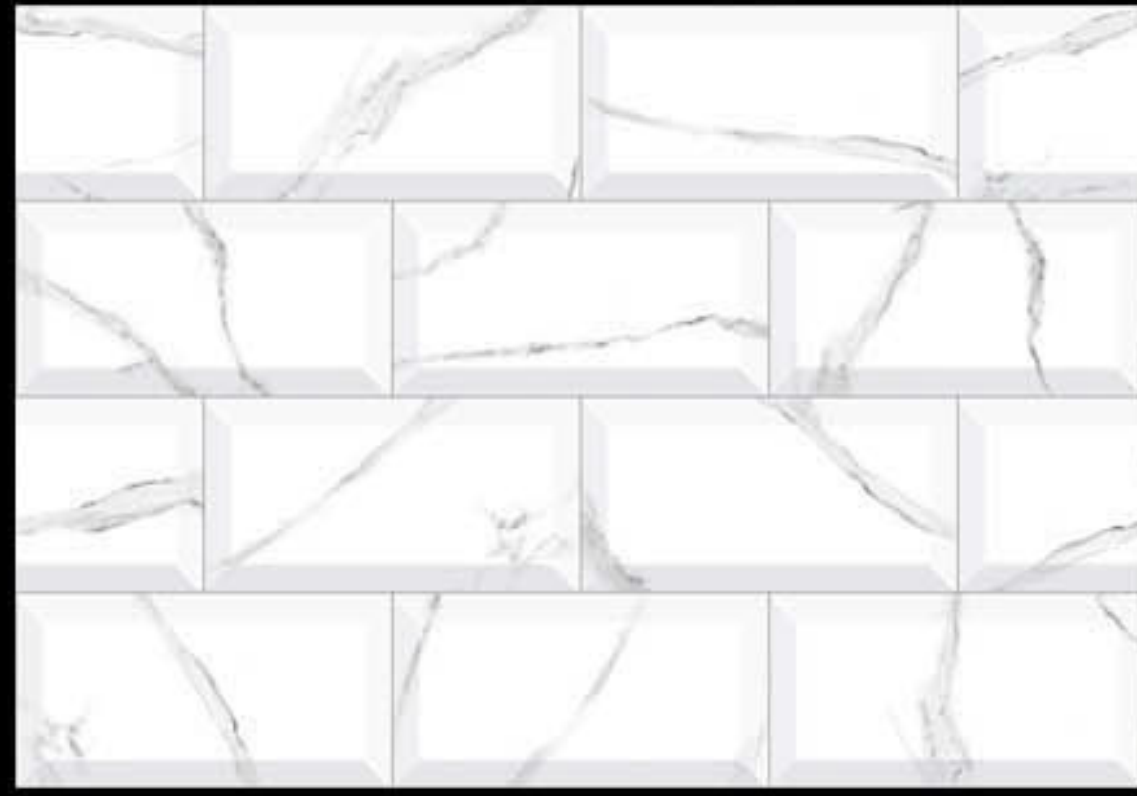

TEMPLE\_05\_LT



TEMPLE\_05\_HL\_1




TEMPLE\_05\_HL\_2




300X450MM

TEMPLE SERIES

**REXTRON**<sup>®</sup>  
DIGITAL WALL TILES

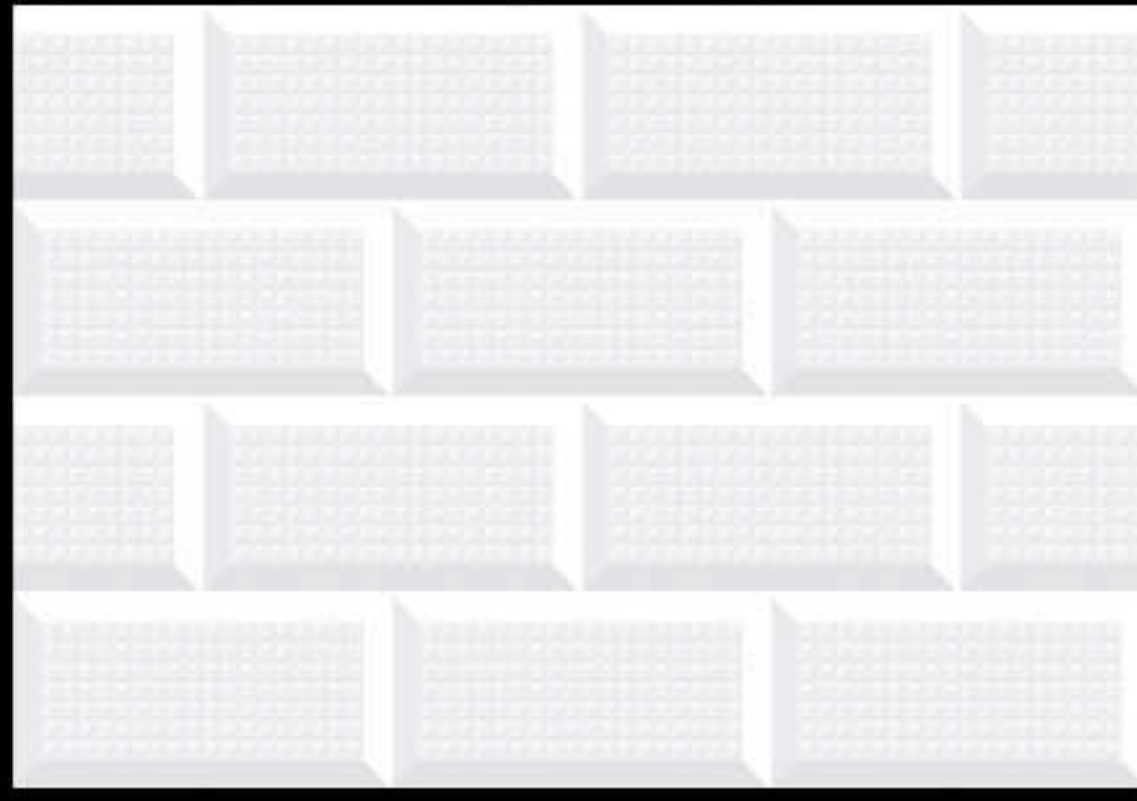

TEMPLE\_06\_LT

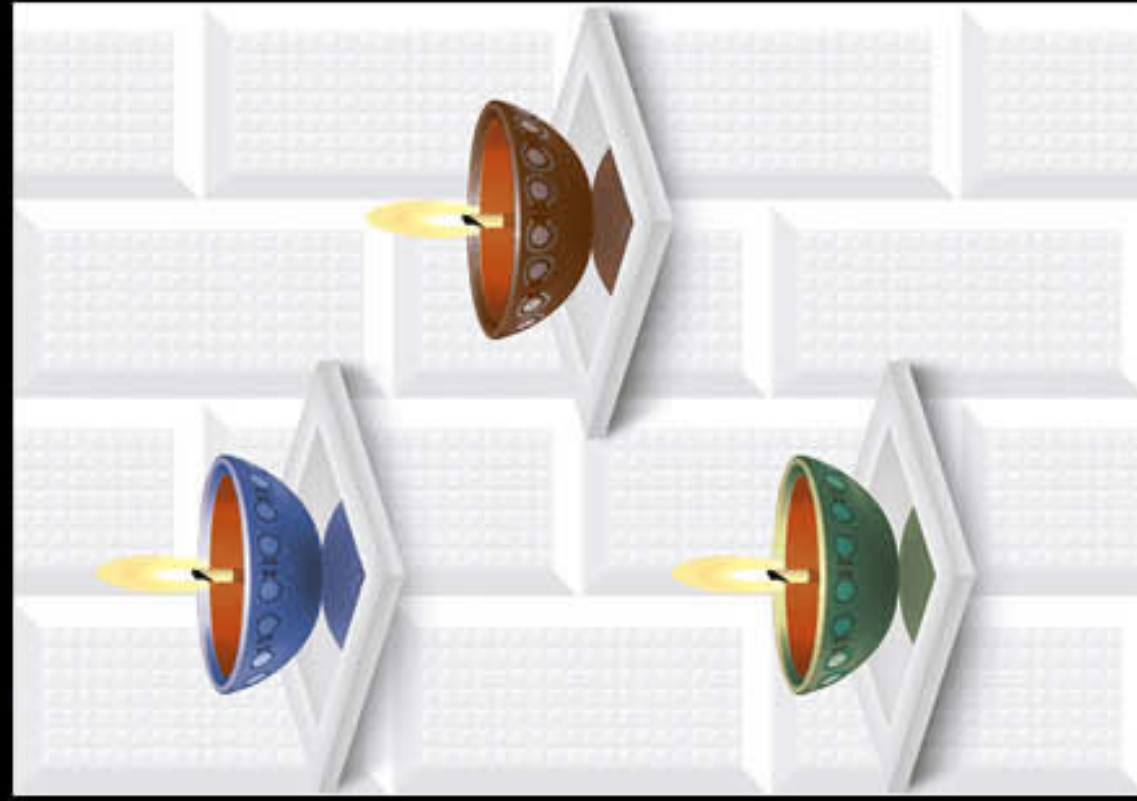

TEMPLE\_06\_HL\_1



TEMPLE\_06\_HL\_2





300X450MM

TEMPLE SERIES

REXTRON®  
DIGITAL WALL TILES



TEMPLE\_07\_HL\_1\_A




TEMPLE\_07\_HL\_1\_B



TEMPLE\_07\_HL\_2



TEMPLE\_07\_HL\_3

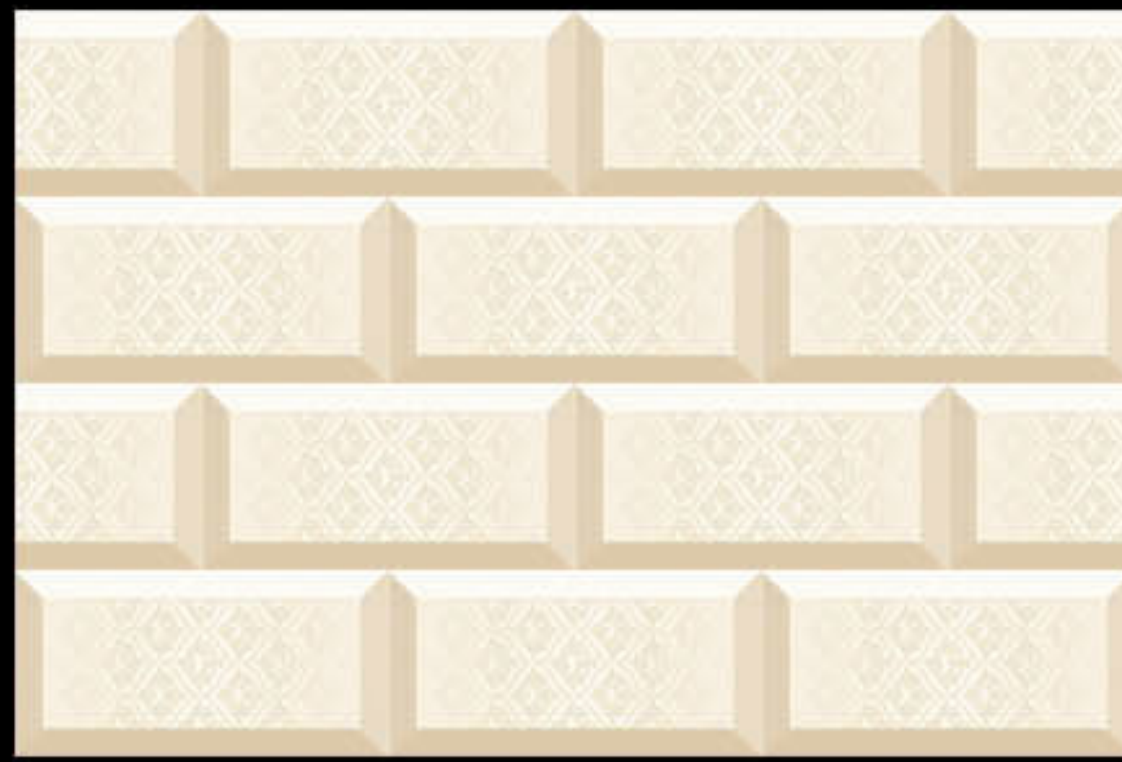

TEMPLE\_07\_LT



# Laying Instructions

---

Before laying of ceramic material, you should take the following aspects into account.

- Check if the ceramic material is suitable for the selected site, according to its specifications and technical characteristics.
- Check whether there is enough material to conclude the work.
- Check the boxes to see confirm in the boxes if the product is the same shade, choice and caliber.

The good performance of the ceramic material depends strongly on the conditions of application for which it is extremely important to ensure the following assumptions.

## 01

### **BASE**

The base must be stable, free of debris, dust and cracks. curing times and stability of the treatments to which the support may have been subjected should be respected, you should check its flatness and stabilize it, if necessary with the help of products suitable for the purpose.

## 02

### **MATERIAL**

For a better visual effect of the product, it is advisable to use alternating ceramic pieces taken from various packages simultaneously, if the product has shade variations or has different graphics and shades, it should be applied randomly.

## 03

### **JOINTS FOR TILE - LAYING**

For a perfect application of the ceramic pieces, you should definitely use joints. They fulfill important aesthetic and technical functions, facilitating alignment of the materials, absorbing any possible deformation liable to be felt in the structure thus preventing the transmission of deformations to the ceramic pieces.

## 04

### **PACKAGING WASTE MANAGEMENT**

Packaging waste should be placed in locations available for recycle, namely in Eco points or adequate systems.



**At. Jasmatgath, Morbi-Jetpar Road,  
B/h, Krypton Ceramic, Near Canal,  
Morbi-363 642 (Guj.) INDIA.**



**rextronceramics@gmail.com**



**www.rextronceramics.com**